

TAOS WELLNESS KIOSK

WELLNESS ASSESSMENT + CONTACTLESS VISITOR EXPERIENCE

- Contactless messaging, directory and wayfinding on the display
- Temperature sensors and hand sanitizer built into the kiosk to support your visitor safety program
- Cloud-based TouchSource software for always current messaging and content management
- Contactless Wellness Assessment, Vendor Checkin, Visitor Management and Concierge applications available as add-on services
- Kiosks are available in a variety of powder coat colors and ready for custom vinyl applications
- Fabricated, built and integrated in Colorado USA





TOUCHSOURCE TAOS DESIGNED FOR MARKET READY APPLICATIONS


















KIOSK SPECIFICATIONS

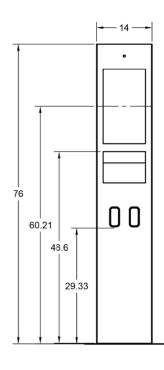


Kiosk could be freestanding or bolted to the floor. Slim profile bas included.






Hand sanitizer is triggered by an internal integrated sensor that dispenses onto hands once movement is detected. Internal pump engineered to despense liquid gel.

Designed to hold one gallon jugs of liquid gel. Specific room to hold spare gallon jug for serviceability and maintenance purposes. One gallon jugs are currently easily sourced with a robust supply chain.



TEMP SENSOR SPECIFICATIONS

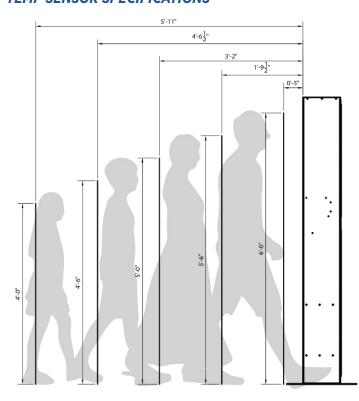

Universal design

Integrated infrared temperature sensor is designed to read the forehead temperature.

Detects temperature of user standing directly in front of the kiosk.

High Quality Sensor

Using the highest quality sensor on the market to deliver the best results possible.

Efficient Design

Sensors is capable of reading user temps quickly and thoroughly. Within a half of a degree of accuracy and a .3 second turn around time makes for an efficient and effective screening.

Primary Function

Designed to act as an initial screening for employees, customers and visitors by identifying elevated temperatures.

Ensure the safety or personnel entering an environment.

Designed to act as an initial screening for employees, customers and visitors. Sensor is accurate to +-.5°F and has a .3 second response time.

BUSINESS PROBLEMS AND VALUE STATEMENTS

How do I safely allow visitors / shoppers / guests into my space?

Utilize the Taos to enable a quick health assessment, sanitize hands, and provide instructional social distancing messaging. Place at least one unit at each entrance and leverage TouchSource safety messaging and posters. Deploy contactless Mobile Directory and Mobile Wayfinding to support safe visitor movement throughout the facility

How do I safely support my employees or occupants as their return to work?

Utilize the Taos at employee entrances or parking garage vestibules to perform health-check self-assessments. Add additional compliance through contactless mobile compliance or social distancing open space reservations

How do I safely allows vendors and contractors back into my space?

Deploy the Taos at vendor check-in locations. Deploy vendor check-in forms with acknowledgement of safety and health requirements. Maintain auditable list of vendor compliance. Integrate with contactless visitor concierge for calling to tenants.

What happens when this "whole COVID thing" is done? I don't want to waste money.

The Taos is designed to be a fully functioning digital information board. It supports directory functionality, mobile wayfinding, messaging boards, marketing boards and a full suite of applications while maintaining the simple hand sanitizer functionality. The temperature functions can be disabled easily or transformed to proximity sensors for interactive experiences in the future.

SPECIFICATIONS

Dimensions

- 22" Model: 76"(h) x 14" (w) x 16" (d)
- 32" Model: 84"(h) x 18.5" (w) x 18.5" (d)

Mounting

- Includes baseplate with interior mounting holes for direct floor mounting
- Baseplate will support weight of kiosk without mounts

Dimensions

- Kiosk is rear lockable with a key for security
- Hand sanitizer is standard 1 gallon hand sanitizer liquid (not gel)
- Floor decals available for indication of standing locations for various height
- Pending ETL and UL certification

